



1. The signal $m(t)$ as shown is applied both to a phase modulator (with k_p as the phase constant) and a frequency modulator with (k_f as the frequency constant) having the same carrier frequency. The ratio k_p/k_f (in rad/Hz) for the same maximum phase deviation is

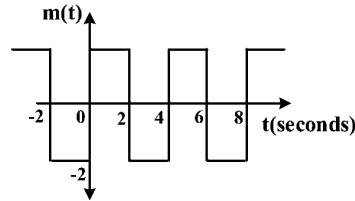

- (a) 8π (b) 4π (c) 2π (d) π
2. A message $m(t)$ bandlimited to the frequency f_m has a power of P_m . The power of the output signal in the figure is

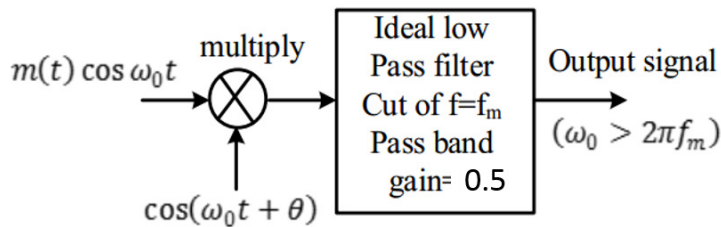


- (a) $(P_m \cos \theta)/2$ (b) $(P_m \sin^2 \theta)/2$
(c) $P_m/4$ (d) $P_m \cos^2 \theta/4$
3. The input $x(t)$ and output $y(t)$ of a system are related as

$$y(t) = \int_{-\infty}^t x(t) \cos(4t) dt$$

The system is

- (a) time-invariant and stable
(b) stable and not time-invariant
(c) time-invariant and not stable
(d) not time-invariant and not stable

4. Consider a system shown in the figure. Let $X(f)$ and $Y(f)$ denote the Fourier transforms of $x(t)$ and $y(t)$ respectively. The ideal HPF has the cut-off frequency 10 KHz.

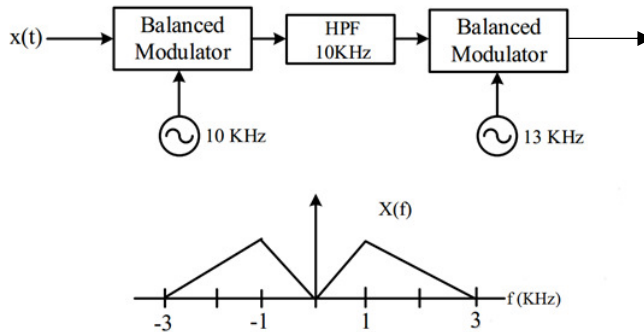


The positive frequencies where $Y(f)$ has spectral peaks are


- (a) 1 KHz and 24 KHz
 - (b) 2 KHz and 24 KHz
 - (c) 1 KHz and 14 KHz
 - (d) 2 KHz and 14 KHz
5. Let $x(t) = \text{rect}\left(t - \frac{1}{2}\right)$ where $\text{rect}(t) = 1$ for $-\frac{1}{2} \leq t \leq \frac{1}{2}$ and zero otherwise, then Fourier Transform of $x(t) + x(-t)$ will be given by

- (a) $\text{sinc}\left(\frac{\omega}{2}\right)$
- (b) $2\text{sinc}\left(\frac{\omega}{2}\right)$
- (c) $2\text{sinc}\left(\frac{\omega}{2}\right) \cos\left(\frac{\omega}{2}\right)$
- (d) $2\text{sinc}\left(\frac{\omega}{2}\right) \sin\left(\frac{\omega}{2}\right)$

16. In the network shown below, switch is moved from position a to b at $t = 0$. The current $i_L(t)$ for $t > 0$ is given as

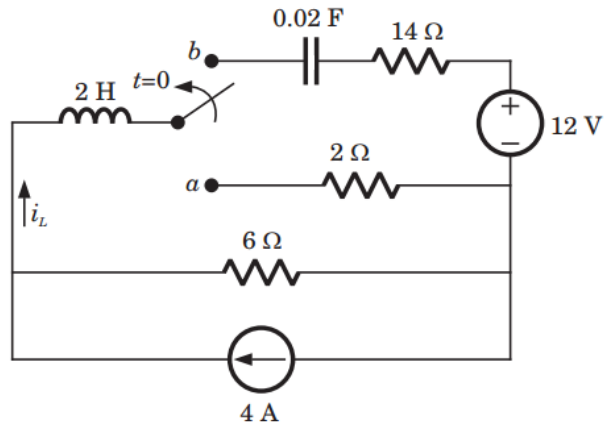


- (a) $(4 - 6t)e^{4t} A$
 (b) $(3 - 6t)e^{-4t} A$
 (c) $(3 - 9t)e^{-5t} A$
 (d) $(3 - 8t)e^{-5t} A$
17. The voltage gain v_{out}/v_{in} of a circuit shown below is zero. If $\omega = 333.33 \text{ rad/s}$, the values of C is

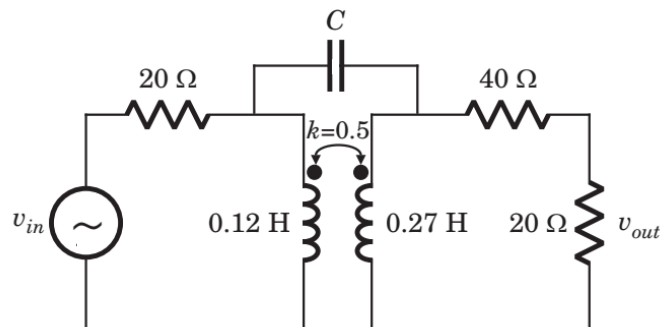


- (a) 3.33 mF
 (b) 33.33 mF
 (c) 3.33 μF
 (d) 33.33 μF


18. In the network shown below, switch is opened at $t = 0$ after long time. The current $i_L(t)$ for $t > 0$ is given as

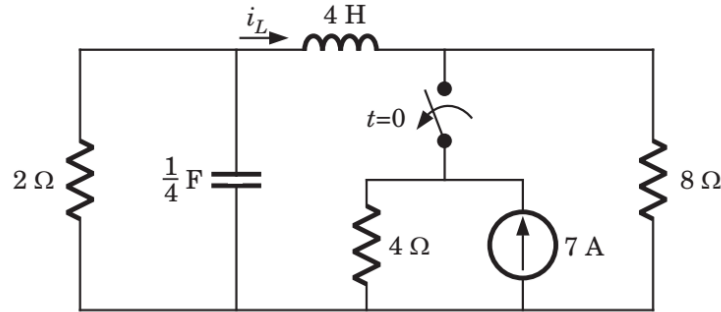

- (a) $e^{-2t}(2 \cos t + 4 \sin t) A$ (b) $e^{-2t}(3 \sin t - 4 \cos t) A$
(c) $e^{-2t}(-4 \sin t + 2 \cos t) A$ (d) $e^{-2t}(2 \sin t - 4 \cos t) A$
19. The Q factor of a RLC circuit is 5 at its resonance frequency of 1 kHz. Find the bandwidth of the circuit
(a) 100 Hz (b) 200 Hz (c) 400 Hz (d) 50 Hz
20. For the circuit shown in figure, find the frequency at which this circuit will be at resonance

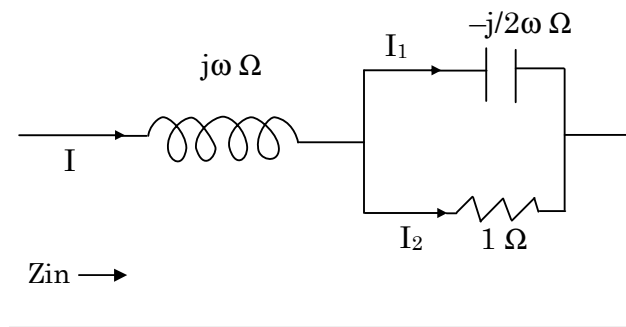


- (a) 1 rad/sec (b) 2 rad/sec
(c) 0.25 rad/sec (d) 0.5 rad/sec
21. What is the power loss in the 10Ω resistor in the Network shown in figure?

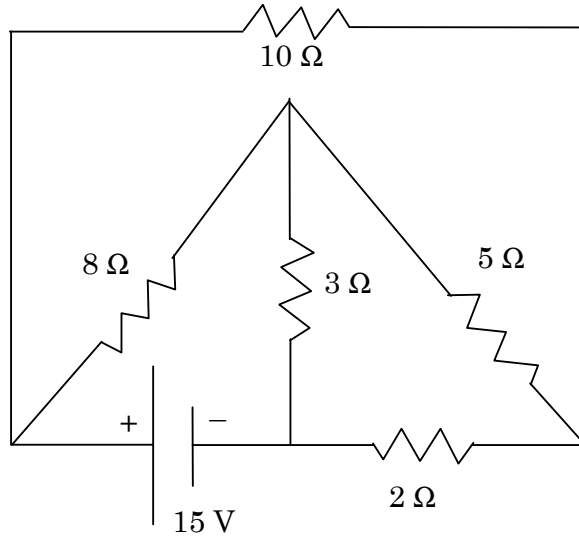

- (a) 15.31 W (b) 15.13 W (c) 12.3 W (d) 13.2 W


22. The voltmeter in the circuit shown in the figure is ideal. The transformer has two identical windings with perfect coupling. The reading on the voltmeter will be

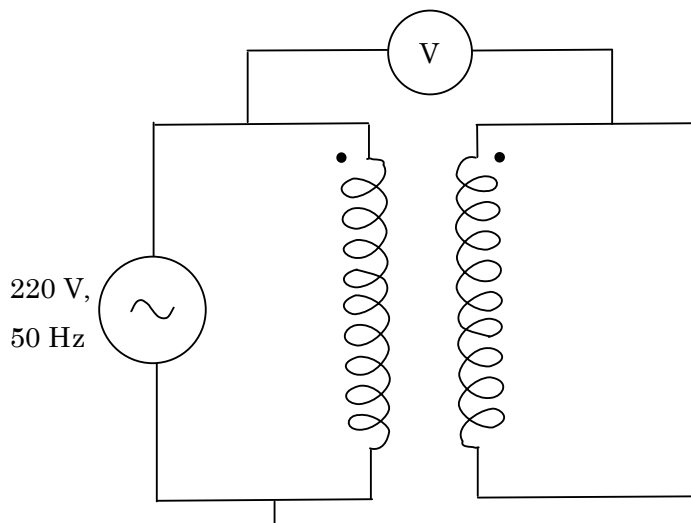

- (a) 440 V (b) 220 V (c) 110 V (d) Zero




23. The Thevenin's equivalent circuit of the network shown in figure is across a-b is

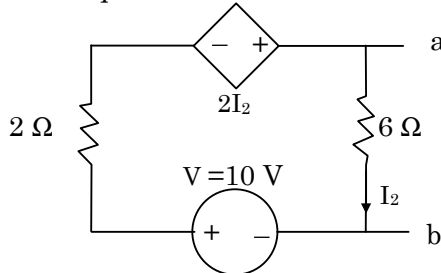

- (a) 1 Ω (b) 2 Ω (c) 3 Ω (d) 4 Ω


24. The average power consumed by the following circuit is

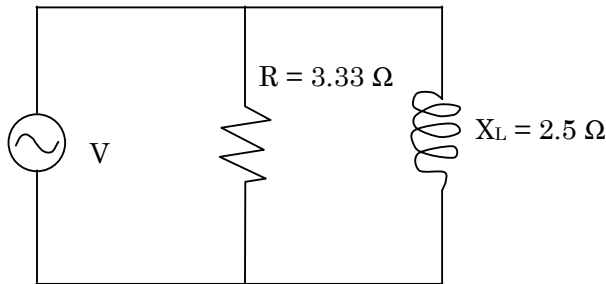

$V_{rms} = 20 \angle 53.13^\circ V$

- (a) 100 W (b) 110 W (c) 120 W (d) 160 W


25. The given figure shows the pole zero pattern of a filter in the S-plane. The Filter in question is a

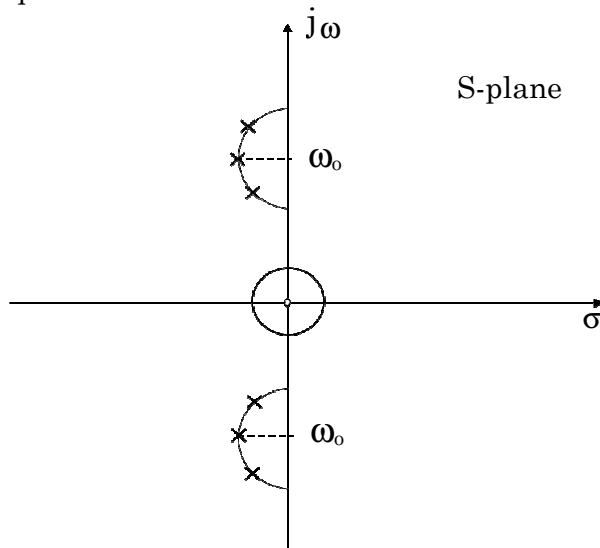

- (a) Band elimination filter (b) Band pass filter
(c) Low Pass Filter (d) High Pass Filter




26. Output voltage V_0 of the circuit shown in figure below. (The input voltages are $V_1 = 2.5\text{ V}$ & $V_2 = 1\text{ V}$)

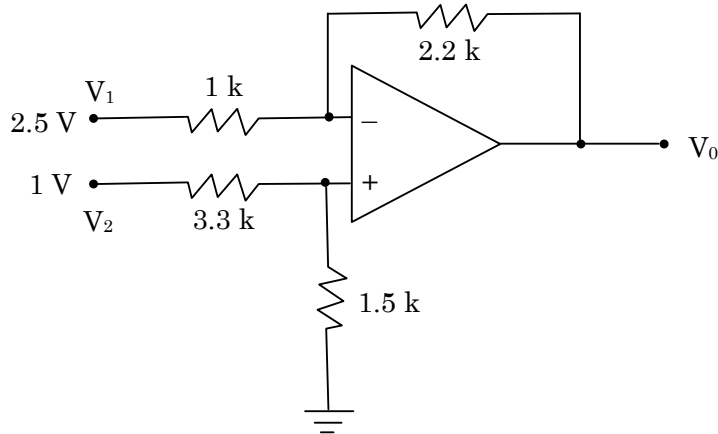

- (a) 4.0 V (b) -4.0 V (c) -4.5 V (d) 4.5 V
27. Without any additional circuitry an 8:1 MUX can be used to obtain
- (a) Some but not all Boolean functions of 3 variables
(b) All function of 3 variables but none of 4 variables
(c) All functions of 3 variables and some but not all of 4 variables
(d) All functions of 4 variables


28. The circuit shown in the figure converts

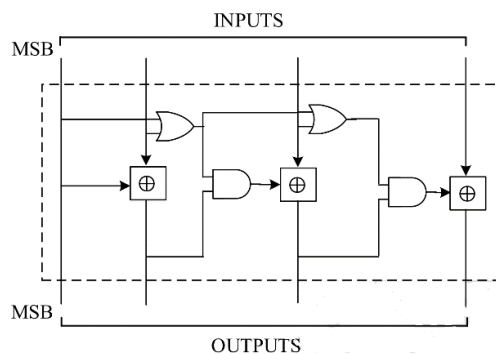

- (a) BCD to binary code (b) Binary to Excess-3 code
(c) Excess-3 to Gray code (d) Gray to Binary code



29. The following CMOS transistor based circuit with A, B, C as input and X, Y as output represents which circuit?

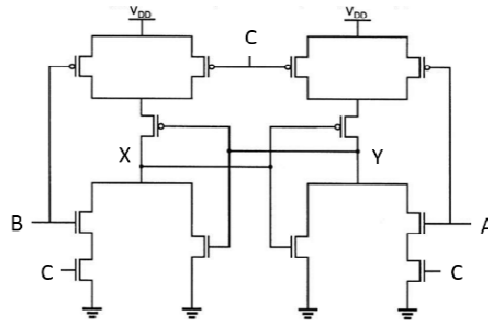


- (a) Positive edge trigger J-K Flip-Flop
- (b) Negative edge trigger J-K Flip-Flop
- (c) Positive edge trigger S-R Flip-Flop
- (d) None of the above

30. Minimum number of complementary CMOS transistors pair will be required to implement function, $F = ABC + (A + B + C)$ are

- (a) 6
- (b) 7
- (c) 8
- (d) 9


31. The CMOS circuit shown below implements the function

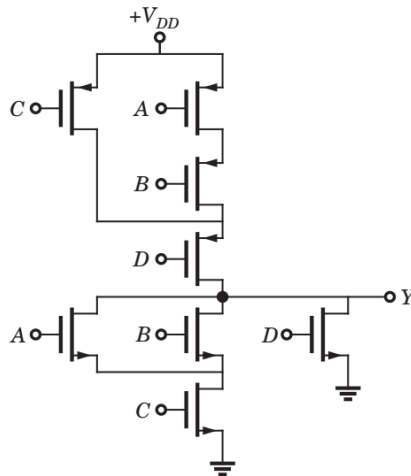


- (a) $(A + B)C + D$
- (b) $\overline{(AB + C) + D}$
- (c) $\overline{(A + B)C + D}$
- (d) $(AB + C)D$

35. Class C amplifier operates
- Entire cycle of i/p signal
 - Half of the cycle of i/p signal
 - Slightly more than half of the cycle of i/p signal
 - Less than half of the cycle of i/p signal
36. A particular amplifier circuit used for frequency doubling is.
- Push-push
 - Push-pull
 - Pull-push
 - Pull-pull

37. The configuration of given figure is a

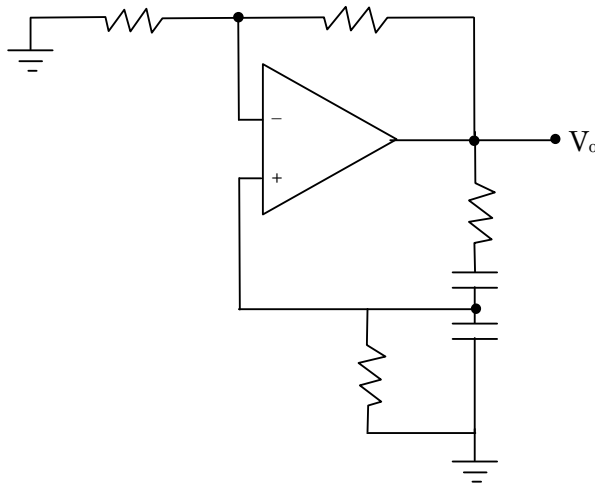


- Precision Integrator
 - Hartley Oscillator
 - Butterworth high pass filter
 - Wein bridge oscillator
38. For current flowing through semi-conductor, which of the following statement is true
- Only conduction current
 - Only Diffusion Current
 - Conduction Current + Diffusion Current
 - None of the above
39. Which of the following statement is true for Programmable Logic array(PLA)?

	INDIAN SPACE RESEARCH ORGANISATION	SET A
	Recruitment Entrance Test for Scientist/Engineer 'SC' 2017	

- (a) Fixed AND array and Fused programmable OR array
- (b) Fused programmable AND array and Fixed OR array
- (c) Fused programmable AND array and Fused programmable OR array
- (d) None of the above
40. When transistors are used in digital circuits they usually operate in the:
- (a) Active region
- (b) Breakdown region
- (c) Saturation and cut-off regions
- (d) Linear region
41. Two initially identical samples A & B of pure germanium are doped with donors to concentrations of 1×10^{20} and 3×10^{20} respectively. If the hole concentration in A is 9×10^{12} then the hole concentration in B at the same temperature will be
- (a) $3 \times 10^{12} \text{ m}^{-3}$
- (b) $7 \times 10^{12} \text{ m}^{-3}$
- (c) $11 \times 10^{12} \text{ m}^{-3}$
- (d) $27 \times 10^{12} \text{ m}^{-3}$
42. The built in potential (diffusion potential) in a p-n junction
- (a) Is equal to the difference in the fermi level of the 2 sides, expressed in volts
- (b) Increase with the increase in the doping levels of the two sides
- (c) Increase with the increase in temperature
- (d) All of the above
43. Transistors Q_1 and Q_2 are identical and $\beta \gg 1$ in the circuit shown in the figure below. The output voltage is ($V_t = 0.026 \text{ V}$):



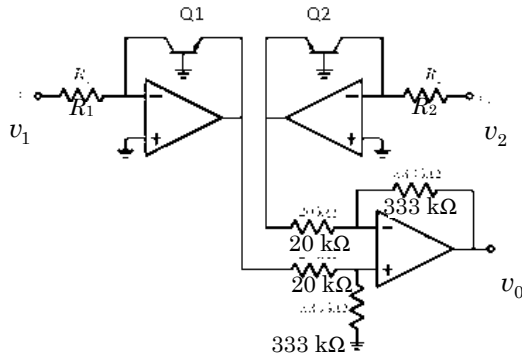

- (a) $2 \log_{10} \left(\frac{v_2 R_1}{v_1 R_2} \right)$ (b) $\log_{10} \left(\frac{v_2 R_1}{v_1 R_2} \right)$
- (c) $2.3 \log_{10} \left(\frac{v_2 R_1}{v_1 R_2} \right)$ (d) $4.6 \log_{10} \left(\frac{v_2 R_1}{v_1 R_2} \right)$


44. Consider following 8085 microprocessor program

```
MVI A, DATA1
ORA A
JM DISPLAY
OUT PORT1
CMA
DISPLAY : ADI 01H
OT PORT1
HLT
```

If DATA1 = A7H, the output at PORT1 is

- (a) A7H (b) 58H (c) 00H (d) 59H
45. From the figure, obtain state equation



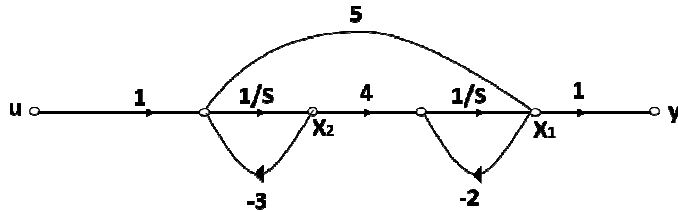


(a) $\dot{[X]} = \begin{bmatrix} 0 & -3 \\ -2 & 4 \end{bmatrix} [X] + \begin{bmatrix} 0 \\ 1 \end{bmatrix} u$ (b) $\dot{[X]} = \begin{bmatrix} -2 & 4 \\ 0 & -3 \end{bmatrix} [X] + \begin{bmatrix} 0 \\ 1 \end{bmatrix} u$

(c) $\dot{[X]} = \begin{bmatrix} 0 & -3 \\ -2 & 4 \end{bmatrix} [X] + \begin{bmatrix} 1 \\ 0 \end{bmatrix} u$ (d) $\dot{[X]} = \begin{bmatrix} -2 & 4 \\ 0 & -3 \end{bmatrix} [X] + \begin{bmatrix} 1 \\ 0 \end{bmatrix} u$

46. In an ADC, the minimum Effective Number of Bits (ENOB) requires to represent each quantization level to achieve Signal to Noise and Distortion Ratio (SINAD) of 70 dB is
 (a) 8 bits (b) 10 bits (c) 11 bits (d) 12 bits
47. Two isotropic antennas are separated by a distance of two wavelengths. If both the antennas are fed with currents of equal phase and magnitude, the number of lobes in the radiation pattern in the horizontal plane are
 (a) 2 (b) 4 (c) 6 (d) 8
48. The half-power beam width (HPBW) of an antenna in the two orthogonal planes are 120° and 40° respectively. The directivity of the antenna is approximately equals to
 (a) 10 dB (b) 6.5 dB (c) 12 dB (d) 8.5 dB
49. Two resistors R_1 and R_2 (in ohms) at temperatures $T_1 K$ and $T_2 K$ respectively, are connected in series. Their equivalent noise temperature is
 (a) $T_1 + T_2$ (b) $R_1 T_1 + R_2 T_2$
 (c) $(R_1 T_1 + R_2 T_2) / (R_1 R_2)$ (d) $(R_1 T_1 + R_2 T_2) / (R_1 + R_2)$



	INDIAN SPACE RESEARCH ORGANISATION	SET A
	Recruitment Entrance Test for Scientist/Engineer 'SC' 2017	

55. Let $Y(k)$ be the 5-point DFT of the sequence $y(n) = \{1 \ 2 \ 3 \ 4 \ 5\}$. What is the 5-point DFT of the sequence $Y(k)$?

- (a) $[15 \ -2.5 + 3.4j \ -2.5+0.81j \ -2.5-0.81j \ -2.5-3.4j]$
- (b) $[1 \ 5 \ 4 \ 3 \ 2]$
- (c) $[5 \ 25 \ 20 \ 15 \ 10]$
- (d) $[5 \ 4 \ 3 \ 2 \ 1]$

56. Let A be the series

$$\sum_{n=1}^{\infty} \frac{(-1)^n}{\log(n+2)}$$

and B be the series

$$\sum_{n=2}^{\infty} \left(\frac{3n-4}{3k+2} \right)^{\frac{(n+1)}{3}}$$

for real numbers. Then which of the following is true.

- (a) Both the series A and B are divergent
- (b) Both the series A and B are convergent
- (c) Series A is convergent and series B is divergent
- (d) Series A is conditionally convergent and series B is divergent

57. A test has 5 multiple-choice questions. Each question has 4 answer options (A, B, C, D). What is the probability that a student will choose "B" for at least three questions if he/she leaves no questions blank?


- (a) $1/1024$
- (b) $1/64$
- (c) $53/512$
- (d) $29/128$



62. Laplace transform of $e^{-at}f(t)$ is


- (a) $F(s)e^{at}$ (b) $F(s-a)$ (c) $F(s+a)$ (d) $\frac{F(s)}{s} + a$

63. A monochromatic plane wave of wavelength $500 \mu\text{m}$ is propagating in the direction as shown in the figure below. \vec{E}_i , \vec{E}_r and \vec{E}_t denotes incident, reflected and transmitted electric field vectors associated with the wave.

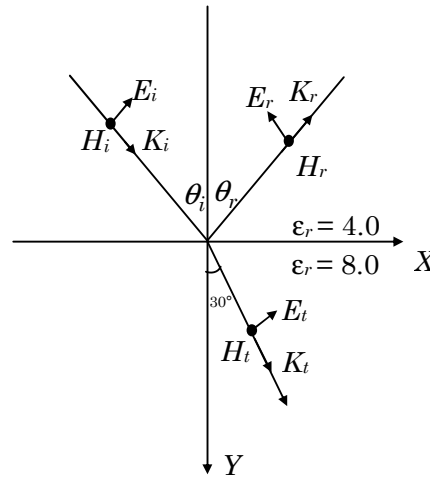


The expression for \vec{E}_t and \vec{E}_r are

- (a) $\frac{E_0}{\sqrt{2}}(\hat{a}_x - \hat{a}_y)e^{-j\frac{2\pi \times 10^4}{5\sqrt{2}}(x+y)}$ V/m and $0.10 \frac{E_0}{\sqrt{2}}(\hat{a}_x + \hat{a}_y)e^{-j\frac{2\pi \times 10^4}{5\sqrt{2}}(x-y)}$ V/m
- (b) $\frac{E_0}{\sqrt{2}}(\hat{a}_x - \hat{a}_y)e^{-j\frac{2\pi \times 10^4}{5\sqrt{2}}(x+y)}$ V/m and $-0.10 \frac{E_0}{\sqrt{2}}(\hat{a}_x + \hat{a}_y)e^{-j\frac{2\pi \times 10^4}{5\sqrt{2}}(x-y)}$ V/m
- (c) $\frac{E_0}{\sqrt{2}}(\hat{a}_x + \hat{a}_y)e^{-j\frac{2\pi \times 10^4}{5\sqrt{2}}(x-y)}$ V/m and $\frac{E_0}{\sqrt{2}}(\hat{a}_x - \hat{a}_y)e^{-j\frac{2\pi \times 10^4}{5\sqrt{2}}(x+y)}$ V/m
- (d) $\frac{E_0}{\sqrt{2}}(\hat{a}_x - \hat{a}_y)e^{-j\frac{2\pi \times 10^4}{5\sqrt{2}}(x+y)}$ V/m and $\frac{E_0}{\sqrt{2}}(\hat{a}_x + \hat{a}_y)e^{-j\frac{2\pi \times 10^4}{5\sqrt{2}}(x-y)}$ V/m

	INDIAN SPACE RESEARCH ORGANISATION	SET A
	Recruitment Entrance Test for Scientist/Engineer 'SC' 2017	

64. Indicate which one of the following modes do NOT exist in a rectangular resonant cavity
- (a) TE₁₁₀ (b) TE₀₁₁ (c) TM₁₁₀ (d) TM₁₁₁
65. A long solenoid of radius R , having N turns per unit length carries a time dependent current $I(t) = I_0 \sin(\omega t)$. The magnitude of induced electric field at a distance $R/2$ radially from the axis of the solenoid is
- (a) $\frac{R}{2} \mu_0 N I_0 \omega \cos(\omega t)$ (b) $\frac{R}{4} \mu_0 N I_0 \omega \cos(\omega t)$
- (c) $\frac{R}{2} \mu_0 N I_0 \omega \sin(\omega t)$ (d) $\frac{R}{4} \mu_0 N I_0 \omega \sin(\omega t)$
66. Penetration depth of magnetic field inside a superconductor is
- (a) Always zero
- (b) London depth of penetration
- (c) Skin depth of penetration
- (d) Inside Full bulk of material
67. A parallel plate air-filled capacitor has plate area of 10^{-4} m^2 and plate separation of 10^{-3} m . It is connected to a 2 V, 1.8 GHz source. The magnitude of the displacement current is ($\epsilon_0 = 1/36\pi \times 10^{-9} \text{ F/m}$)
- (a) 200 mA (b) 20 mA (c) 20 A (d) 2 mA
68. Two rectangular waveguide have dimensions of $1 \text{ cm} \times 0.5 \text{ cm}$ and $1 \text{ cm} \times 0.25 \text{ cm}$ respectively. Their respective cut-off frequencies will be
- (a) 15 GHz and 30 GHz (b) 30 GHz and 60 GHz
- (c) 15 GHz and 15 GHz (d) 30 GHz and 30 GHz
69. Which of the following has the highest skin depth?



	INDIAN SPACE RESEARCH ORGANISATION	SET A
	Recruitment Entrance Test for Scientist/Engineer 'SC' 2017	

- (a) Al (b) Ag
(c) Au (d) Cu

70. The electric field vector of a wave is given as

$$\vec{E} = E_0 e^{j(\omega t + 3x - 4y)} \cdot \frac{8\vec{a}_x + 6\vec{a}_y + 5\vec{a}_z}{\sqrt{125}} \text{ V/m}$$

Its frequency is 10 GHz. The phase velocity in Y-direction will be

- (a) 2×10^{10} m/s (b) 1.5×10^{10} m/s
(c) 1.85×10^{10} m/s (d) 1.25×10^{10} m/s

71. The electric field of a plane wave propagating in a lossless non-magnetic medium is given by the following equation

$$\vec{E}(z, t) = 3 \cos(2\pi \times 10^9 t + \beta z) \hat{a}_x + 2 \cos\left(2\pi \times 10^9 t + \beta z + \frac{\pi}{2}\right) \hat{a}_y$$

The type of wave polarization is

- (a) Right hand elliptical (b) Right hand circular
(c) Left hand elliptical (d) Left hand circular

72. A ring of radius R carries a linear charge density λ . It is rotating with angular speed ω . The magnetic field at its center is

- (a) $\frac{3\mu_0\lambda\omega}{2}$ (b) $\frac{\mu_0\lambda\omega}{2}$
(c) $\frac{\mu_0\lambda\omega}{\pi}$ (d) $\mu_0\lambda\omega$



$$G(j\omega) = \frac{k}{j\omega(j0.2\omega + 1)(j0.05\omega + 1)}$$

Find open loop gain (k) with gain margin of 20 dB

- (a) 5.2 (b) 2.5 (c) 0.1 (d) 2.25


79. The open loop transfer function of a unity feedback system is

$$G(S) = \frac{K}{S(S^2 + S + 2)(S + 3)}$$


The range of K for which the system is stable is

- (a) $\frac{21}{44} > K > 0$ (b) $13 > K > 0$ (c) $\frac{21}{44} < K < \infty$ (d) $-6 < K < \infty$

80. For the CE (Common emitter) circuit shown, what will be the value of I_E and V_{CE} ?

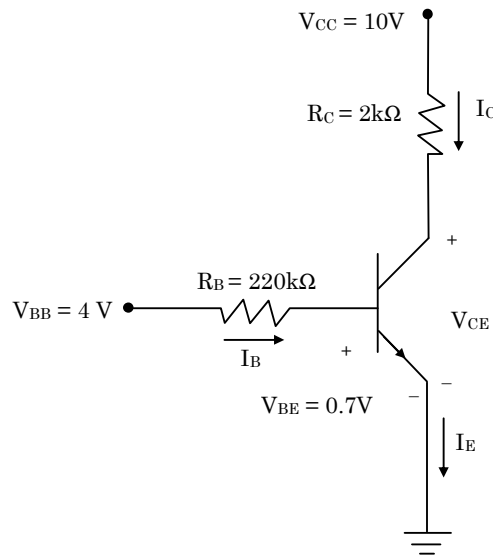

- (a) 3 mA, 3 V (b) 4 mV, 4 V (c) 3.02 mA, 4.2 V (d) 3.02 mA, 4 V

	INDIAN SPACE RESEARCH ORGANISATION	SET A
	Recruitment Entrance Test for Scientist/Engineer 'SC' 2017	

Space for rough work

Electronics

May 2017

	INDIAN SPACE RESEARCH ORGANISATION	SET A
	Recruitment Entrance Test for Scientist/Engineer 'SC' 2017	

Space for rough work

